


EAS[®]-Compact[®]-R

Rustproof Torque Limiting Clutches

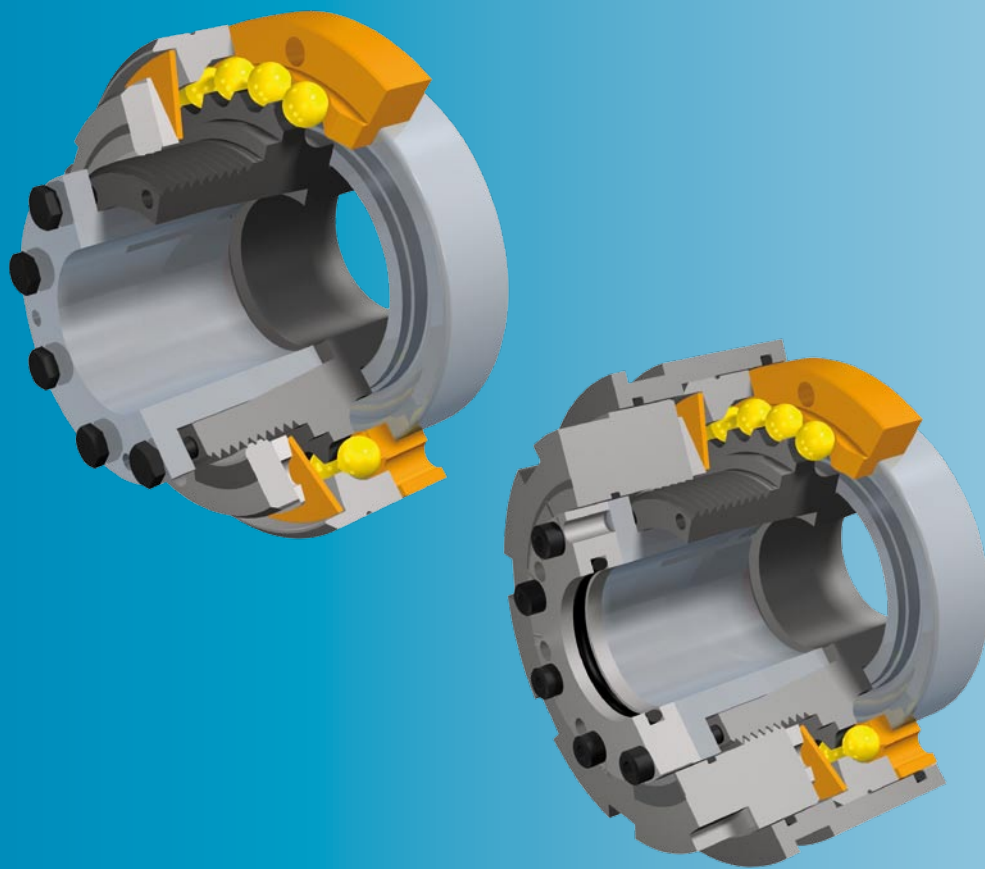

- *Stainless steel design*
- *Immediate disengagement in case of overload*
- *Permanent backlash-free torque transmission*
- *Short delivery times*

www.mayr.de

P.49A.V03.GB

mayr[®]
your reliable partner

Mechanical torque limiting clutches are the only reliable means of maximising the productivity and economic efficiency of machines and systems. These clutches prevent damage in case of malfunctions and collisions and therefore also expensive downtimes and repairs.

In the food industry, the chemical industry and in process engineering, wet conditions, cleaning liquids and aggressive media are part of the everyday ambient conditions, which only torque limiting clutches with high-quality corrosion protection are able to withstand without any damage over

long periods of time. Standard torque limiting clutches are normally unsuitable for such application fields.

mayr® power transmission offers various types of clutches, which are optimally suited for such application fields. The range includes open designs made of stainless steels, sealed, rustproof clutches, as well as complete, ready-to-mount units with standard flanges for integration between the motor and the gearbox (see brochure EAS®-HTL Housed Torque Limiter).

EAS®-Compact®-R

Completely made of rustproof stainless steel *

We manufacture the EAS®-Compact® in rustproof design for your series requirements.

- Identical in construction to the EAS®-Compact® standard version



- Synchronous function
- Automatic re-engagement
- Mechanical separation of input and output in case of overload
- Exact torque limitation due to high disengagement and repeat accuracies
 - Permanent backlash-free torque transmission
 - Low mass moment of inertia due to compact design
 - Easy torque adjustment
- Long service lifetime due to hardened functional components
- Application of lubricants approved for the food industry

EAS®-Compact®-RA sealed

Completely rustproof with seal

- No penetration of cleaning liquids or any other media, no emission of grease
- Completely closed due to rustproof seal



Order Number

_ / 4 9 A . _ _ 5 . _ / _ / _					
▲	▲	▲	▲	▲	
Size	Torque range **	Hub	Design	Bore	With limit switch
0	medium	1	0	Hub	for possible designs, see catalogue EAS®-Compact® K.490.V_ _GB
to	high	2	C	Ø d ^{H7}	
3	very high ***			Ø d _p ^{H7}	

Example: Order number 1 / 49A.625.C / 22 / 25 / with limit switch 055.002.5


* Cup springs with high quality corrosion protection.

** See Technical Data, limit torque for overload M_G


*** Not possible with cone bushing design.

Technical Data				Size			
				0	1	2	3
Limit torques for overload ¹⁾	Type 49A.5_5_	M _G	[Nm]	10 - 25	20 - 50	40 - 100	70 - 175
	Type 49A.6_5_	M _G	[Nm]	20 - 50	40 - 100	80 - 200	140 - 350
	Type 49A.725_ ²⁾	M _G	[Nm]	40 - 100	80 - 200	160 - 400	280 - 700
Max. speed		n _{max}	[rpm]	3000	2500	2000	1200
Thrust washer stroke on overload			[mm]	1,5	1,8	2,0	2,2


EAS®-Compact®-R
Type 49A.515.0
6

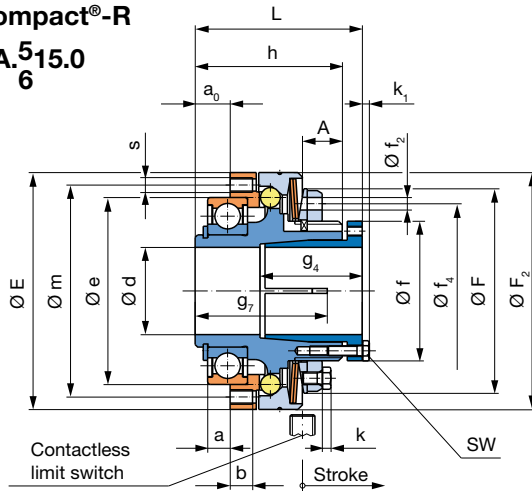


EAS®-Compact®-RA
Type 49A.515.C
6

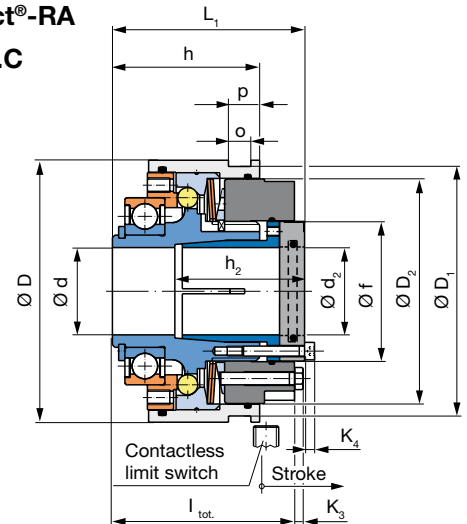

EAS®-Compact®-R
Type 49A.15.0

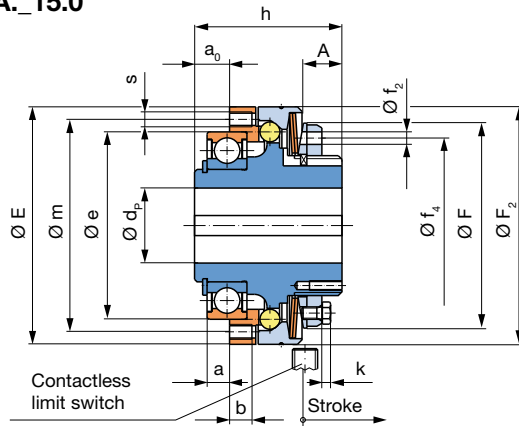

EAS®-Compact®-RA
Type 49A.15.C

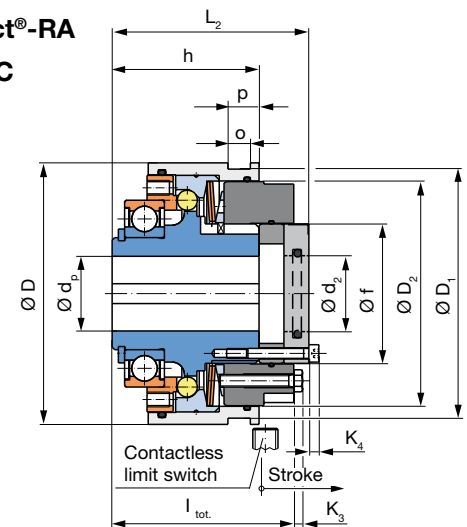

Dimensions [mm]	Size			
	0	1	2	3
A	13,5	16	17	20,5
a ⁵⁾	7	9	10	10
a ₀	11	14	16	18
b	7	9	10	12
D	90	105	120	140
D ₁	85	100	115	135
D ₂	75	90	105	125
E	80	95	110	130
e _{h5} ⁶⁾	62	75	90	100
F	67	82	97	117
F ₂	80	95	110	130
f	44	56	70	84
f ₂	5	5	6	7
f ₄	55	70	84	100
Min. shaft length	g ₄	39	42	48
	g ₇	36	48	49
	h ₂	47	52	63
h	48	59	64	75
K ₃	2,8	3,5	4	4
K ₄	4	4	5	6
k	2,8	3,5	4,0	4,0
k ₁	2,8	2,8	3,5	4,0
L ⁷⁾	56	67	73	86
L ₁ ⁷⁾	64	77	88	98
L ₂	64	79	84	99

Dimensions [mm]	Size			
	0	1	2	3
I _{tot.}	Dependent on torque setting			
m	71	85	100	116
o	9	9	9	9
p	10,5	12,5	13	14
s	8 x M5	8 x M6	8 x M6	8 x M8
SW	7	7	8	10

For clutch operation from "Torque range high (Type 49A.6_5...)", screws quality class 12.9 must be used for mounting the drive element.

Bores [mm]	Size				
	0	1	2	3	
d ^{3) 4)}	d _{min}	15	22	32	35
	d _{max}	25	35	45	55
d _P ¹⁰⁾	d _{P min} ⁸⁾	15	22	28	32
	d _{P max} ⁹⁾	25	30	40	50
d ₂	Acc. to customer's request - As for standard, without bore.				

We reserve the right to make dimensional and constructional alterations.

- 1) Further sizes for smaller and larger torques available on request.
- 2) Torque range 7 only for hubs with keyway.
- 3) Shaft tolerance up to $\varnothing 38_{H7}$, over $\varnothing 38_{H8}$.
- 4) Transmittable torques with smaller bores available on request.
- 5) Mounting tolerance + 0,1
- 6) Tolerance user-side H7
- 7) Dimensions in untightened condition (shorter in tightened condition).
- 8) Smaller bores for low torques available on request.
- 9) Larger bores available on request.
- 10) The position of the keyway to the mounting bore "s" in the pressure flange is not defined. Defined position available on request.



Headquarters

Chr. Mayr GmbH + Co. KG
Eichenstrasse 1, D-87665 Mauerstetten
Tel.: 0 83 41/8 04-241, Fax: 0 83 41/80 44 22
www.mayr.de, eMail: info@mayr.de



mayr®

Service Germany

Baden-Württemberg

Jochen Maurer
 Mittlere Holdergasse 5
 71672 Marbach
 Tel.: 0 71 44/1 80 34+35
 Fax: 0 71 44/1 53 20

Bavaria

Manfred Schwarz
 Eichenstrasse 1
 87665 Mauerstetten
 Tel.: 0 83 41/80 41 04
 Fax: 0 83 41/80 44 23

Franken

Jochen Held
 Unterer Markt 9
 91217 Hersbruck
 Tel.: 0 91 51/81 48 64
 Fax: 0 91 51/81 62 45

Hagen

Detlef Bracht
 Im Langenstück 6
 58093 Hagen
 Tel.: 0 23 31/78 03 0
 Fax: 0 23 31/78 03 25

Kamen

Thomas Kant
 Lünener Strasse 211
 59174 Kamen
 Tel.: 0 23 07/23 63 85
 Fax: 0 23 07/24 26 74

North

Bernd Massmann
 Schiefer Brink 8
 32699 Extertal
 Tel.: 0 57 54/9 20 77
 Fax: 0 57 54/9 20 78

Rhine-Main

Wolfgang Rattay
 Jägerstrasse 4
 64739 Höchst
 Tel.: 0 61 63/48 88
 Fax: 0 61 63/46 47

Branch office

China

Mayr Zhangjiagang
 Power Transmission Co., Ltd.
 Changxing Road No. 16,
 215600 Zhangjiagang
 Tel.: 05 12/58 91-75 62
 Fax: 05 12/58 91-75 66
 info@mayr.cn

Great Britain

Mayr Transmissions Ltd.
 Valley Road, Business Park
 Keighley, BD21 4LZ
 West Yorkshire
 Tel.: 0 15 35/66 39 00
 Fax: 0 15 35/66 32 61
 sales@mayr.co.uk

France

Mayr France S.A.
 Z.A.L. du Minopole
 BP 16
 62160 Bully-Les-Mines
 Tel.: 03.21.72.91.91
 Fax: 03.21.29.71.77
 contact@mayr.fr

Italy

Mayr Italia S.r.l.
 Viale Veneto, 3
 35020 Saonara (PD)
 Tel.: 0 49/8 79 10 20
 Fax: 0 49/8 79 10 22
 info@mayr-italia.it

Singapore

Mayr Transmission (S) PTE Ltd.
 No. 8 Boon Lay Way Unit 03-06,
 TradeHub 21
 Singapore 609964
 Tel.: 00 65/65 60 12 30
 Fax: 00 65/65 60 10 00
 info@mayr.com.sg

Switzerland

Mayr Kupplungen AG
 Tobelackerstrasse 11
 8212 Neuhausen am Rheinfall
 Tel.: 0 52/6 74 08 70
 Fax: 0 52/6 74 08 75
 info@mayr.ch

USA

Mayr Corporation
 4 North Street
 Waldwick
 NJ 07463
 Tel.: 2 01/4 45-72 10
 Fax: 2 01/4 45-80 19
 info@mayrcorp.com

Representatives

Australia

Transmission Australia Pty. Ltd.
 22 Corporate Ave,
 3178 Rowville, Victoria
 Australien
 Tel.: 0 39/7 55 44 44
 Fax: 0 39/7 55 44 11
 info@transaus.com.au

China

Mayr Shanghai
 Representative Office
 Room 506, No. 1007,
 Zhongshan South No. 2 Road
 200030 Shanghai, VR China
 Tel.: 0 21/64 57 39 52
 Fax: 0 21/64 57 56 21
 sales@mayr.com.cn

India

National Engineering
 Company (NENCO)
 J-225, M.I.D.C.
 Bhosari Pune 411026
 Tel.: 0 20/27 47 45 29
 Fax: 0 20/27 47 02 29
 nenco@vsnl.com

Japan

MATSUI Corporation
 2-4-7 Azabudai
 Minato-ku
 Tokyo 106-8641
 Tel.: 03/35 86-41 41
 Fax: 03/32 24 24 10
 k.goto@matsui-corp.co.jp

South Africa

Torque Transfer
 Private Bag 9
 Elandsfontein 1406
 Tel.: 0 11/3 45 80 00
 Fax: 0 11/9 74 05 24
 torque@bearings.co.za

South Korea

Mayr Korea Co. Ltd.
 no. 302, 3rd floor, Kyoungnam
 Taxi Mutual Aid Association Hall,
 209-3, Myoung-Seo Dong,
 Changwon, Korea
 Tel.: 0 55/2 62-40 24
 Fax: 0 55/2 62-40 25
 info@mayrkorea.com

Taiwan

German Tech Auto Co., Ltd.
 No. 162, Hsin sheng Road,
 Taishan Hsiang,
 Taipei County 243, Taiwan R.O.C.
 Tel.: 02/29 03 09 39
 Fax: 02/29 03 06 36
 steve@zfgta.com.tw

Machine tools

Applications in China
 DTC. Co.Ltd.,
 Block 5th, No. 1699,
 East Zhulu Road,
 201700 Shanghai, China
 Tel.: 021/59883978
 Fax: 021/59883979
 dtcshanghai@online.sh.cn

More representatives:

Austria, Benelux States, Brazil, Canada, Czech Republic, Denmark, Finland, Greece, Hongkong, Hungary, Indonesia, Israel, Malaysia, New Zealand, Norway, Philippines, Poland, Romania, Russia, Slovakia, Slovenia, Spain, Sweden, Thailand, Turkey

You can find the complete address for the representative responsible for your area under www.mayr.de in the internet.

mayr®
 your reliable partner